

Self Retractable Lifeline


MICRO BLOCK 2 METERS

One of the lightest in its class.

**TECHNICAL
SPECIFICATION**

HEIGHT SAFETY

FAR0701

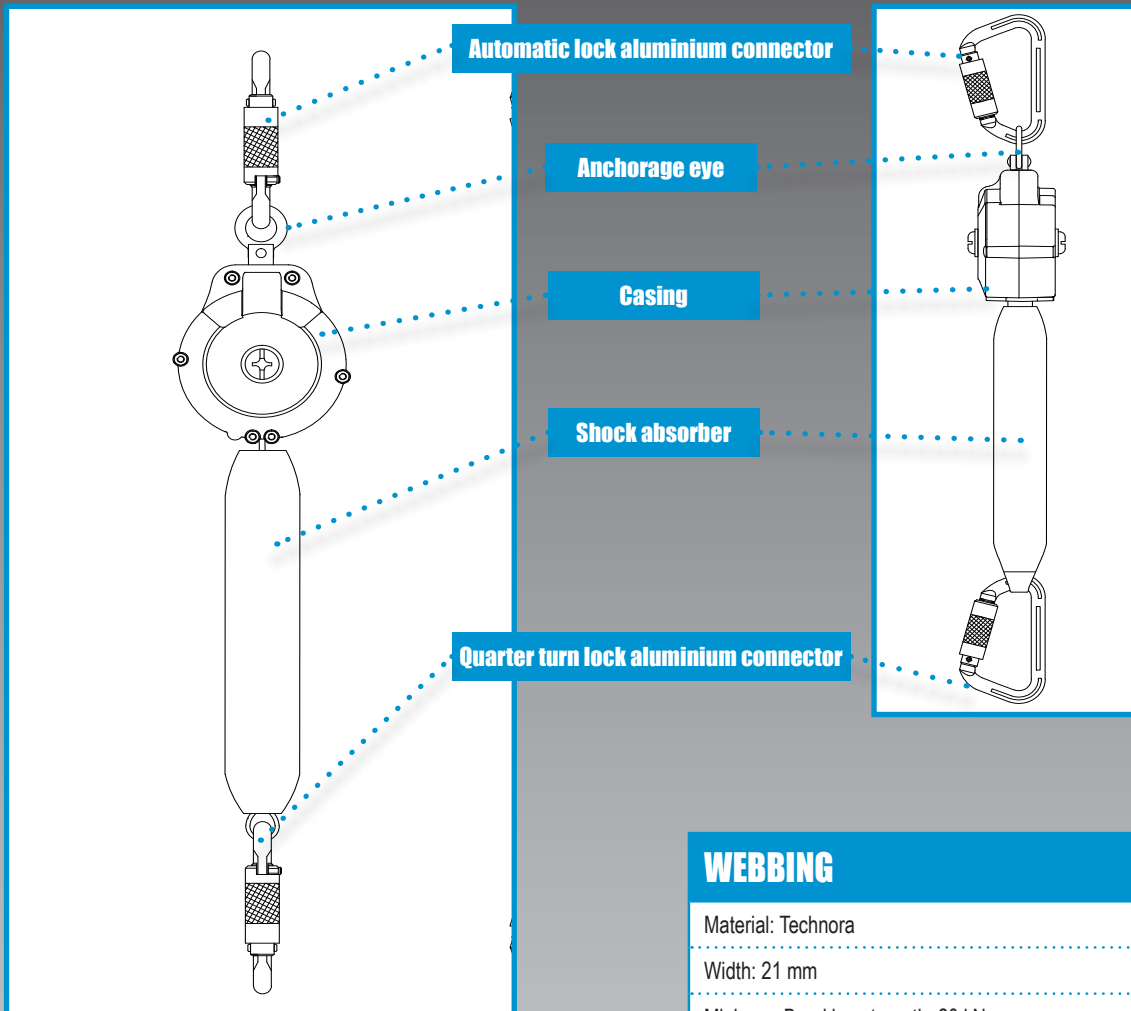

DIMENSIONS

Length: 2 meters

Weight: 848.5 g (+/- 20 g)

CLEANING & MAINTENANCE

In case of minor soiling, wipe the equipment with a cotton cloth or soft brush. Do not use any abrasive material. For intensive cleaning wash in water at a temperature between 25°C to 50°C using a neutral detergent. It should be allowed to dry by itself and be kept away from open fires/flames or any other source of heat. Avoid direct sunlight.

The user should carry out a pre-use check of the Self Retractable Lifeline, to ensure that it is in a serviceable condition and operates correctly before it is used.

The pre-use check shall involve checking of any wear or abrasion on wire ropes/webbing and sign of corrosion if any on metal parts or any breakage of the casing.

WEBBING

Material: Technora

Width: 21 mm

Minimum Breaking strength: 20 kN

CHARACTERISTICS

Robust and durable plastic casing.

Webbing width 21 mm with shock absorber.

2 quarter turn gate aluminium connector on both ends. Gate opening: 21mm. Conforms to EN362:2004 Class B.

CONFORMITY

EN 360: 2002 Rated to 140 kg

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Horizontal use (Sharp Edge VG11 RFU 11.060:2014), fall factor 2 use

Static strength: 15 kN for 3 min

Dynamic strength: 100 kg mass free fall with the breaking force of less than 6 kN & arrest distance less than 2 meters.

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



MANUFACTURING FOR SAFETY
WWW.JPSAFETY.COM

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 15/03/2019, V1