

Fire Accessories

Alarms

Rotary Hand Bell

- ✓ Provides a reliable independent fire warning inside or outside
- ✓ Quick and simple installation and maintenance free
- ✓ High sound output (75dB at 20m) from the 230mm diameter die-cast aluminium bell
- ✓ Epoxy polyester powder coated



RHB1T | Rotary Hand Bell

Product Specifications

PRODUCT CODE	DESCRIPTION
RHB1T	Rotary hand bell

Air Horn

- ✓ Hand held gas horn, snap-on type
- ✓ Supplied with environmentally safe non-flammable gas (134a tetrafluoroethane)
- ✓ 116dB(A) at 2 metres
- ✓ 200ml aluminium bottle



X6300 | Gas Horn



X6301 | Gas Bottle

Product Specifications

PRODUCT CODE	DESCRIPTION
X6300	Gas horn - comes with 200ml non-flammable gas bottle
X6301	Spare 200ml non-flammable gas bottle (for use with above)

Screamer Alarm

- ✓ Ideal for industrial premises, portable buildings, marquees etc up to 2000sq metres where there is no need for zoning
- ✓ Safe, reliable and loud (118dB) independent fire warning
- ✓ Battery test facility
- ✓ Supplied with battery and test key
- ✓ Can be linked together (up to 10 units) using alarm cable
- ✓ Installed in minutes!

Self contained alarm requiring no wiring



SCA001 | Screamer with Break Glass



SCA002 | Push Button

Product Specifications

PRODUCT CODE	DESCRIPTION
SCA001	Screamer - with break glass unit
SCA002	Screamer - with push button
SCA003	Spare break glass (pack of 5)
SC070	Test key (pack of 10)

Fire Accessories

Alarms

Smoke / CO Alarms

- ✓ Quick, easy installation
- ✓ Alarm sound output - 85dB (min) at 3 metres

- ✓ Interconnectable models - up to 12 alarms may be connected

Loud and quick and easy to install



SA100B



SA100C



SA100S



SA100L



SA105C



HA103C



SA100SL



SA105SLC



CMA204

Ionisation Smoke Alarms

Highly sensitive - respond to all standard fires, giving a quick response to fast flaming fires.

Optical Smoke Alarms

Highly sensitive - respond to all standard fires. Senses smoke using light scatter principle, giving a quick response to visible smouldering fires.

Heat Alarm

Uses a fixed temperature fast response thermistor type sensor, operating in range 54°C to 62°C. Ideal for kitchens and garages where the use of optical or ionisation alarms would lead to unwanted nuisance alarms.

Carbon Monoxide Alarm

Proven sensor, based on electrochemical technology - checks CO concentration every 50 seconds.

Product Specifications

PRODUCT CODE	DESCRIPTION	BATTERY (SUPPLIED)
SA100B	Ionisation - standard unit*	9V Alkaline
SA100C	Ionisation - interconnectable*	9V Alkaline
SA100S	Ionisation - with 'HUSH' feature*	9V Alkaline
SA100L	Ionisation - with escape light*	9V Alkaline
SA105C	Optical - interconnectable*	9V Alkaline
HA103C	Heat alarm - interconnectable*	9V Alkaline
SA100SL	Ionisation - standard unit *	Lithium - 10 year life
SA105SLC	Optical - interconnectable*	Lithium - 10 year life
CMA204	Carbon monoxide alarm**	9V Alkaline

* BSI Kitemarked to BS EN 14604 : 2005

** BSI Kitemarked to BS EN 50291 : 2001

Fire Accessories

Alarms

Extinguisher Theft

- ✓ Self contained
- ✓ Easy to install
- ✓ Battery operated (and included)

EA1
For use in fire equipment cabinets.
Activated by magnetic switch when door opened. 95dB at 1 metre.

EA2
For use as: Fire extinguisher stand / plinth alarm (extinguisher stands on spring switch, which activates alarm when removed) OR Fire extinguisher security pin alarm (activates when pin is removed) 95dB at 1 metre.

EA3
Highly visible deterrent to stop vandalism, theft and misuse of extinguishers. Activated by cable being removed from alarm unit. 98dB at 1 metre.



EA1 | Cabinet Alarm



EA2 | Extinguisher Alarm



EA3 | Extinguisher Alarm



EA2 | Extinguisher Alarm

Product Specifications


P. CODE	DESCRIPTION
EA1	Cabinet alarm (magnetic switch operated)
EA2	Extinguisher stand/plinth/pin alarm (spring switch operated)
EA3	Extinguisher alarm (cable operated)

Door Exit Stopper


- ✓ 95dB (low) / 97dB (high) at 1 metre
- ✓ Battery operated (and included)
- ✓ Self contained
- ✓ Easy to install

Highly effective alarms to alert you when unauthorised exit or entry occurs through an emergency exit door - fitted with key operated override facility.

Note : X3204 can be fitted in 3 places with or without remote installation kit. See illustrations for door options available.

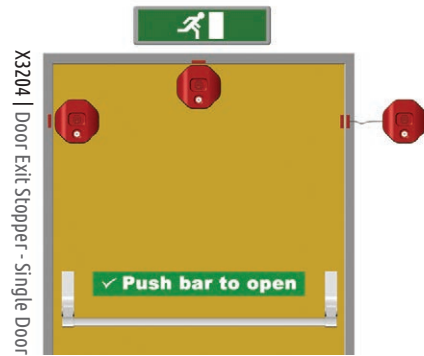

X3204 | Door Exit Stopper - Single Door

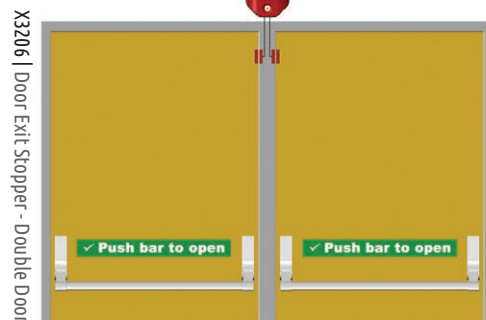

X3206 | Door Exit Stopper - Double Door

Product Specifications

P. CODE	DESCRIPTION
X3204	Door exit stopper - single door
X3205	Remote installation kit (inc 3m wire, connection block and fixings)
X3206	Door exit stopper - double door

Fire Accessories

Fire Exit Security

Dorgard

- ✓ Smart, unobtrusive and robust design
- ✓ Easy, foot operated release and adjustment
- ✓ Installs in under 5 minutes
- ✓ 4 colours and 2 covers available
- ✓ Batteries included
- ✓ Automatically releases when fire alarm sounds
- ✓ Automatic night-time release facility
- ✓ Improves access for wheelchair users in line with DDA
- ✓ Battery operated, wire free solution
- ✓ Tested to BS EN 1155 and accepted by the fire brigade

Solves the problem of wedged open fire doors



Dorgard is the acoustically activated fire door hold open device designed to protect and save lives whilst allowing freedom of access.



X3257 | Black



X3260 | Red



X3261 | White



X3262 | Mahogany



X3263 | Brass Effect Cover



X3264 | Brushed Aluminium Effect Cover

Product Specifications

PRODUCT CODE	DESCRIPTION	COLOUR
X3257	Dorgard - Fire door retainer	Black
X3260	Dorgard - Fire door retainer	Red
X3261	Dorgard - Fire door retainer	White
X3262	Dorgard - Fire door retainer	Mahogany
X3263	Cover	Brass effect
X3264	Cover	Brushed aluminium effect

Fire Accessories

Fire Exit Security

Break Glass Key Holder


- ✓ Unique snap-fit design
- ✓ Made from durable ABS plastic and crystal styrene window for safety
- ✓ We recommend the use of a hammer when breaking window



Product Specifications

PRODUCT CODE	DESCRIPTION
JBG1	Break glass - plain window
JBG2	Break glass - printed window
G1	Spare plain window
G2	Spare printed window
HAM1	Hammer and chain

Panic Bolt

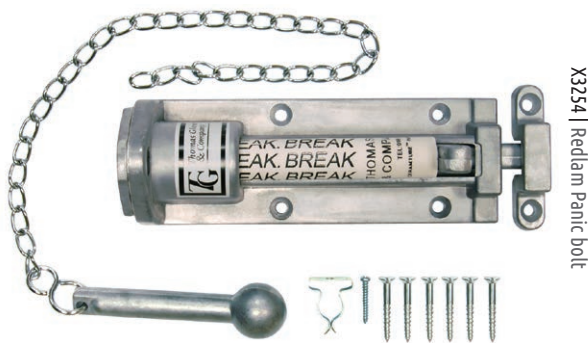

Product Specifications

PRODUCT CODE	DESCRIPTION
X3254	Redlam panic bolt (MK1)
X3255	Spare ceramic tubes (pack of 20)
X3256	Spare latch

Call Point Covers

- ✓ Stop false alarms without restricting legitimate operation of break glass call points
- ✓ Fits over most flush or surface mounted break glass call points
- ✓ Spacer supplied with surface mounted covers



Product Specifications

PRODUCT CODE	DESCRIPTION
X3200	Standard - Flush mounted call point cover
X3201	Standard - Surface mounted call point cover
X3202	Standard - Flush mounted call point cover with sounder
X3203	Standard - Surface mounted call point cover with sounder
X3207	Compact - Flush mounted call point cover
X3208	Compact - Surface mounted call point cover

Protection Cages

- ✓ Protect vulnerable smoke detectors or emergency / external lighting
- ✓ Manufactured from 9 gauge steel rods and plastic coated for internal / external use



Product Specifications

P. CODE	DESCRIPTION	DIMENSIONS
X3209	Smoke detector cage (flush)	75mm depth x 175mm diameter
X3210	Smoke detector cage (surface)	115mm depth x 180mm diameter
X3211	Emergency & external light guard	220 x 450 x 128mm (H x W x D)