# SONIS®

HELMET-MOUNTED EAR DEFENDER RANGE

EAR DEFENDERS AVAILABLE IN 3 MODELS: SONIS®1, SONIS®C AND SONIS®3

# HEARING PROTECTION

SPECIFICATIO

TECHNICAL

### **INSTRUCTIONS FOR USE**

- Fit the ear defender attachments to the universal slots on your helmet
- Pull cups to maximum extension and set arms in "stand by" position.
- Press wire bands inwards until you hear a click on both sides
- These will ball as inwards until you hear a click on ooth sides
- Adjust cups by sliding up or down



#### MATERIALS

ABS Cups
Foam/PET combination cushions
Stainless steel wire
Acetal & Nylon helmet-mounting

# **LIMITATIONS OF USE**

Protection will only be offered if the helmet and ear defenders are fitted correctly

Ear pads may deteriorate with use and should be examined at frequent intervals

Do not apply paint, solvents, adhesives or self-adhesive labels , except in accordance with instructions from the manufacturer

The ear pads, when in contact with the skin may cause allergic reactions to susceptible individuals

If this occurs leave the hazard area, remove the ear defender and seek medical advice

If the ear defenders are to be worn for long periods the noise level must be reduced to 80dB

Before selection of a suitable ear defender a noise survey should be carried out

Spectacle frames and hair between the ear pads and the head may affect the performance of the ear defender

Hearing Protection should be used in accordance with the local legislation in force at time of use

NUFACTURING FOR SAFETY

WWW.JSP.CO.UK

#### SONIS® FEATURES & BENEFITS

Fits JSP range of EVO helmets, including: EVO2, EVO3, EVO5, EVO6100, EVOLite, & EVOLite Skyworker

Hygienic: Hygiene kits are available for each model and the product is easy to wipe clean.

Colour coding: The Sonis<sup>®</sup> ear defenders range has been designed with a colour code system for simple selection.

Also available in extra visibility version



# **DIMENSIONS OF EAR DEFENDERS**

Sonis®1:
Depth: 60mm
Width: 100mm
Height: 160mm
Weight: 239g (Approx.)
Sonis®C
Depth: 60mm
Width: 100mm
Height: 160mm
Weight: 256g (Approx.)
Sonis®3
Depth: 85mm
Width: 100mm
Height: 160mm
Weight: 383g (Approx.)



#### **CONFORMITY**

Conforms to EN 352-3:2002

EC Certificate Number 662532

Kitemark Number KM 662534



UKSALES@JSPCOLUK TEL=+44(0)1993 826050 (C) (C) (C) (C)



# SONIS®

**HELMET-MOUNTED EAR DEFENDER RANGE** 

EAR DEFENDERS AVAILABLE IN 3 CUP SIZES: SONIS®1, SONIS®C, SONIS®3

#### HEARING PROTECTION


SPECIFICATION

TECHNICAL

## **DIMENSIONS OF OUTER PACKAGING**

Sonis®1 & Sonis®C:


Quantity: 10 Weight: 9.6kg (Approx.)

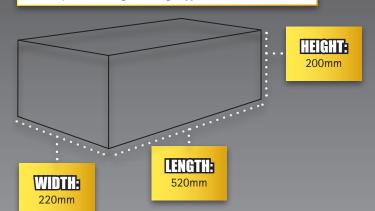

# **DIMENSIONS OF OUTER PACKAGING**

Sonis®3:

Quantity: 10 Weight: 9.6kg (Approx.)

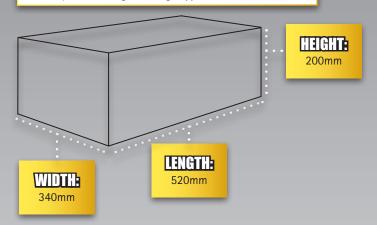

### **CLEANING & MAINTENANCE**

Clean with soap and warm water and dry with a soft cloth

- Do not use chemical or abrasive cleaners
- Store out of direct sunlight, away from chemicals and not exposed to extremes of temperature

**SONS** 

# PERFORMANCE

SONIS®1 EAR DEFENDERS								
Frequency (Hz)	63	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	12.4	14.5	13.1	25.5	33.0	34.5	35.0	37.5
Standard Deviation (dB)	3.0	3.3	2.2	1.9	3.6	2.8	3.1	4.5
Assumed Protection (dB)	9.3	11.2	10.9	23.6	29.4	31.7	31.9	33.0
	H=32		M=23		L=15		SNR=26	

SONIS®C EAR DEFENDERS								
Frequency (Hz)	63	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	14.4	15.6	21.3	28.0	35.1	36.5	41.9	44.3
Standard Deviation (dB)	2.7	2.7	2.0	1.9	4.3	3.0	3.5	3.3
Assumed Protection (dB)	11.7	13.0	19.2	26.1	30.9	33.5	38.3	40.9
	H=35		M=28		L=20		SNR=31	

SONIS®3 EAR DEFENDERS								
Frequency (Hz)	63	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	18.3	21.8	28.0	38.3	44.5	39.5	40.5	39.5
Standard Deviation (dB)	3.6	2.5	1.6	4.2	4.0	4.5	3.1	2.8
Assumed Protection (dB)	14.6	19.2	26.4	34.1	40.5	35.0	37.4	36.7
	H=37		M=35		L=26		SNR=36	





MANUFACTURING FOR SAFETY WWW.JSPCO.UK



